

# COUPLEURS ET CONNECTEURS HYDRAULIQUES

VALVES AND  
QUICK COUPLINGS



## INDEX / INDEX

COUPLEURS ET CONNECTEURS HYDRAULIQUES	PAG.	VALVES AND QUICK COUPLINGS
ISO A	<b>73</b>	ISO A
ISO B	<b>74</b>	ISO B
ISO B	<b>75</b>	ISO B
SERIE H5000	<b>75</b>	H5000 SERIE
SERIE PUSH PULL	<b>76</b>	PUSH PULL SÉRIES
SERIE NÓRDIC	<b>76</b>	NORDIC STANDAR
VISAGE PLANA350 Bar	<b>77</b>	FLAT FACE SERIES 350Bar
VISAGE PLANA 250Bar	<b>77</b>	FLAT FACE SERIES 250Bar
SERIE HAMMER	<b>78</b>	HYDRAULIC HAMMER SERIES
FILETAGE SERIE	<b>78</b>	SCREW COUPLINGS
SERIE 700 Bar	<b>79</b>	700 Bar SERIES
SERIE 1000 Bar	<b>79</b>	1000 Bar SERIES
SERIE 1500 Bar	<b>80</b>	1500 Bar SERIES
2-VOIES HAUT PRESSION ROBINETS	<b>80</b>	2-WAY HIGH PRESSURE BALL VALVE
3-VOIES HAUT PRESSION ROBINETS	<b>81</b>	3-WAY HIGH PRESSURE BALL VALVE
SERIE 35	<b>81</b>	35 SERIES
SÉRIE74	<b>81</b>	74 SERIES
SÉRIE83	<b>81</b>	83 SERIES
SÉRIE93	<b>81</b>	93 SERIES
SÉRIE103	<b>81</b>	103 SERIES
SÉRIE105	<b>81</b>	105 SERIES
SÉRIE106	<b>82</b>	106 SERIES
SÉRIE150	<b>82</b>	150 SERIES
SÉRIE152	<b>82</b>	152 SERIES
SÉRIE124	<b>82</b>	124 SERIES
SÉRIE127	<b>82</b>	127 SERIES
SÉRIE100	<b>82</b>	100 SERIES
SÉRIE165	<b>82</b>	165 SERIES
SERIE DP	<b>82</b>	DP SERIES
SERIE GR	<b>82</b>	GR SERIES

**SERIE ISO A**  
ISO A SERIES


Disponibile: Acier Carbone,  
AISI 304, AISI 316.  
Available: STEEL, AISI 304,  
AISI 316.



**FEMELLE • SOCKET**


**MÂLE • PLUG**

Norme  
Standard 7241-1  
Series A



RÉF. CODE	A	D (mm)	L2 (mm)	W.P. (bar)
501200.0404	1/4" - BSP	26	51	350
501200.0606	3/8" - BSP	32	58,5	300
501200.0808	1/2" - BSP	38	63,5	300
501200.1212	3/4" - BSP	46	83,5	250
501200.1616	1" - BSP	55	97	230
501200.2020	1,1/4" - BSP	70	117	230

Norme  
Standard 7241-1  
Series A




RÉF. CODE	A	D (mm)	L2 (mm)	W.P. (bar)
502200.0404	1/4" - BSP	11,8	36	350
502200.0606	3/8" - BSP	17,25	40,5	300
502200.0808	1/2" - BSP	20,56	46	300
502200.1212	3/4" - BSP	29	56	250
502200.1616	1" - BSP	34,3	63	230
502200.2020	1,1/4" - BSP	44,95	75	230

Capuchon anti-poussière  
Capuchon pour coupleur  
Bouchon p/ Valve Femelle



RÉFÉRENCE CODE	Dimension Size
500100.04	1/4"
500100.06	3/8"
500100.08	1/2"
500100.12	3/4"
500100.16	1"
500100.20	1,1/4"

Capuchon anti-poussière  
Capuchon pour coupleur  
MÂLE  
Bouchon p/ Valve Male



RÉFÉRENCE CODE	Dimension Size
500200.04	1/4"
500200.06	3/8"
500200.08	1/2"
500200.12	3/4"
500200.16	1"
500200.20	1,1/4"

**SERIE ISO B**  
ISO B SERIES


Disponible: Acier Carbone,  
AISI 304, AISI 316 et laiton.  
Available: STEEL, AISI 304,  
AISI 316, Brass.



**FEMELLE • SOCKET**


**MÂLE • PLUG**

Norme  
Standard 7241-1  
Series B



RÉF. CODE	A	D (mm)	L2 (mm)	W.P. (bar)
501001.0202	1/8" - BSP	22	49	400
501001.0404	1/4" - BSP	27	57,7	380
501001.0606	3/8" - BSP	35	65,5	350
501001.0808	1/2" - BSP	42	74	320
501001.1212	3/4" - BSP	52	90	300
501001.1616	1" - BSP	60	103	280

Norme  
Standard 7241-1  
Series B




RÉF. CODE	A	D (mm)	L2 (mm)	W.P. (bar)
502001.0202	1/8" - BSP	10,9	30	400
502001.0404	1/4" - BSP	14,2	36	380
502001.0606	3/8" - BSP	19,1	40,5	350
502001.0808	1/2" - BSP	23,55	46	320
502001.1212	3/4" - BSP	31,45	56	300
502001.1616	1" - BSP	37,8	63	280

Capuchon anti-poussière  
Capuchon pour coupleur  
femelle  
Bouchon p/ Valve Femelle



RÉF. CODE	Dimension Size
500101.04	1/4"
500101.06	3/8"
500101.08	1/2"
500101.12	3/4"
500101.16	1"
500101.20	1,1/4"

Capuchon anti-poussière  
Capuchon pour coupleur  
MÂLE  
Bouchon p/ Valve Male



RÉFÉRENCE CODE	Dimension Size
500201.04	1/4"
500201.06	3/8"
500201.08	1/2"
500201.12	3/4"
500201.16	1"
500201.20	1,1/4"




**SERIE ISO B**  
ISO B SERIES

Disponible en acier, AISI 316 et laiton.  
Available: STEEL, AISI 316, Brass.

**FEMELLE • SOCKET**


Norme Standard 7241-1 Series B



REF. CODE	A	D (mm)	L2 (mm)	W.P. (bar)
501001.2020	1,1/4" - BSP	75	252	100
501001.2424	1,1/2" - BSP	105	262	100

**MÂLE • PLUG**

Norme Standard 7241-1 Series B



REF. CODE	A	D (mm)	L2 (mm)	W.P. (bar)
502001.2020	1,1/4" - BSP	44,4	252	100
502001.2424	1,1/2" - BSP	63,27	262	100


**SERIE H5000**  
H5000 SERIES

Disponible en acier, AISI 316 et laiton.  
Available: STEEL, AISI 316, Brass.



**FEMELLE • SOCKET**


Norme Standard EATON, TUTHILL, GROMELLE



REF. CODE	A	D (mm)	L2 (mm)	W.P. (bar)
50THA0500100	1/8" - BSP	23,88	41,9	1000
50THA0501100	1/4" - BSP	27,94	50	700
50THA0502100	3/8" - BSP	34,03	58,9	600
50THA0503100	1/2" - BSP	38,1	68,8	500
50THA0504100	3/4" - BSP	48	88,9	400
50THA0505100	1" - BSP	52,06	98,8	300

**MÂLE • PLUG**

Norme Standard EATON, TUTHILL, GROMELLE



REF. CODE	A	D (mm)	L2 (mm)	W.P. (bar)
50THA0500200	1/8" - BSP	10,92	27,94	1000
50THA0501200	1/4" - BSP	14,22	35,05	700
50THA0502200	3/8" - BSP	19,05	41,9	600
50THA0503200	1/2" - BSP	20,57	50,03	500
50THA0504200	3/4" - BSP	27,94	62,99	400
50THA0505200	1" - BSP	32,26	70,87	300

**SERIE PUSH-PULL**  
PUSH-PULL SERIES


Disponibile en acier et AISI 316  
Available: STEEL, AISI 316.



**FEMELLE • SOCKET**


**MÂLE • PLUG**

Norme/Standard 7241-1Series A	REF. CODE	A	D (mm)	L2 (mm)	W.P. (bar)
----------------------------------	--------------	---	-----------	------------	---------------



505008.0808P	1/2" - BSP	37,8	63,5	300
--------------	------------	------	------	-----

Norme/Standard 7241-1 Series A	REF. CODE	A	D (mm)	L2 (mm)	W.P. (bar)
-----------------------------------	--------------	---	-----------	------------	---------------



505009.0808P	1/2" - BSP	20,56	48	300
--------------	------------	-------	----	-----

**SERIE NORDIQUE**  
NORDIC STANDARD


Disponibile en acier carbone et AISI 316.  
Available: Stainless steel AISI 316.



**FEMELLE • SOCKET**


**MÂLE • PLUG**

Norme Standard TEM. Profile	REF. CODE	A	D (mm)	L2 (mm)	W.P. (bar)
-----------------------------------	--------------	---	-----------	------------	---------------



502900.04	1/4" - BSP	64	450	
502900.0606	3/8" - BSP	34	60	350
502900.0808	1/2" - BSP	40	65	300
502900.1212	3/4" - BSP	46	72	280
502900.1616	1" - BSP	62	88	250

Norme Standard TEM. Profile	REF. CODE	A	D (mm)	L2 (mm)	W.P. (bar)
-----------------------------------	--------------	---	-----------	------------	---------------



502950.04	1/4" - BSP	11,9	45	450
502950.0606	3/8" - BSP	19,85	38	350
502950.0808	1/2" - BSP	24,7	41,5	300
502950.1212	3/4" - BSP	32,7	46	280
502950.1616	1" - BSP	40,9	54,2	250




**SERIE FACE PLATE  
350 BAR  
FLAT FACE SERIES 350  
BAR**

Disponible en acier carbone et  
AISI 316.  
Available: Stainless steel AISI  
316.

**FEMELLE • SOCKET**


**MÂLE • PLUG**

Norme  
Standard ISO  
16028



REF. CODE	A	D (mm)	L2 (mm)	W.P. (bar)
502500.0404	1/4" - BSP	28	48	350
502500.0606	3/8" - BSP	32	64,5	350
502500.0808	1/2" - BSP	38	80,5	350
502500.1212	3/4" - BSP	42	78	350
502500.1616	1" - BSP	48	92,5	350
502500.2020	1,1/4" - BSP	55	105	300
502500.2424	1,1/2" - BSP	80	132,5	270
502500.3232	2" - BSP	100	165	80

Norme  
Standard ISO  
16028



REF. CODE	A	D (mm)	L2 (mm)	W.P. (bar)
502600.0404	1/4" - BSP	16,2	48	350
502600.0606	3/8" - BSP	19,8	62,5	350
502600.0808	1/2" - BSP	24,5	62,5	350
502600.1212	3/4" - BSP	27	70,5	350
502600.1616	1" - BSP	30	82,5	350
502600.2020	1,1/4" - BSP	36	90	300
502600.2424	1,1/2" - BSP	57	111	270
502600.3232	2" - BSP	73	125	80




**SERIE FACE PLATE  
250 BAR  
FLAT FACE SERIES 250  
BAR**

Disponible: Acier carbone  
AISI 316.  
Available: Stainless steel  
AISI 316.

**FEMELLE • SOCKET**


**MÂLE • PLUG**

Norme  
Standard ISO  
16028



REF. CODE	A	D (mm)	L2 (mm)	W.P. (bar)
502500.0404S	1/4" - BSP	28	48	300
502500.0606S	3/8" - BSP	32	64,5	300
502500.0808S	1/2" - BSP	38	80,5	300
502500.1212S	3/4" - BSP	42	78	220
502500.1616S	1" - BSP	48	92,5	200
502500.2020S	1,1/4" - BSP	55	105	200
502500.2424S	1,1/2" - BSP	80	132,5	200
502500.3232S	2" - BSP	100	165	160

Norme  
Standard ISO  
16028



REF. CODE	A	D (mm)	L2 (mm)	W.P. (bar)
502600.0404S	1/4" - BSP	16,2	48	300
502600.0606S	3/8" - BSP	19,8	62,5	300
502600.0808S	1/2" - BSP	24,5	62,5	300
502600.1212S	3/4" - BSP	27	70,5	220
502600.1616S	1" - BSP	30	82,5	200
502600.2020S	1,1/4" - BSP	36	90	200
502600.2424S	1,1/2" - BSP	57	111	200
502600.3232S	2" - BSP	73	125	160




**SERIE MARTEAU  
HYDRAULIQUE  
VEP SERIES  
HYDRAULIC HAMMER**

Disponible en acier carbone et  
AISI 316.  
Available: Stainless steel AISI  
316.

**FEMELLE • SOCKET**

Norme  
Standard ISO  
16028


REF. CODE	A	D (mm)	L2 (mm)	W.P. (bar)
50FVEP09P	1/2" - BSP	70,8	41,8	550
50FVEP13P	3/4" - BSP	84,8	49,8	550
50FVEP17P	1" - BSP	97,7	58,8	500
50FVEP21P	1.1/4" - BSP	105,8	69,8	470



**MÂLE • PLUG**

Norme  
Standard ISO  
16028

REF. CODE	A	D (mm)	L2 (mm)	W.P. (bar)
50MVEP09P	1/2" - BSP	27	M33X2	550
50MVEP13P	3/4" - BSP	36	M40X3	550
50MVEP17P	1" - BSP	46	M50X3	500
50MVEP21P	1.1/4" - BSP	55	M58X3	470



**COUPLEUR FILETÉ /  
SCREW VALVE**




Disponible en acier carbone et  
AISI 316.  
Available: Stainless steel AISI  
316.

**FEMELLE • SOCKET**

Norme  
Standard DIN  
3852


REF. CODE	A	D (mm)	L2 (mm)	W.P. (bar)
502410.0404I	1/4" - BSP	60	M24X2	450
502410.0606I	3/8" - BSP	64	M28X2	450
502410.0808I	1/2" - BSP	70	M36X2	400
502410.1212I	3/4" - BSP	86	M42X2	400
502410.1616I	1" - BSP	100	M48X3	300



**MÂLE • PLUG**

Norme  
Standard DIN  
3852

REF. CODE	A	D (mm)	L2 (mm)	W.P. (bar)
502310.0404I	1/4" - BSP	59,3	34	450
502310.0606I	3/8" - BSP	61,2	34	450
502310.0808I	1/2" - BSP	67,5	41,8	400
502310.1212I	3/4" - BSP	80	48	400
502310.1616I	1" - BSP	87,5	59,8	300





**SERIE 700 bar**  
700 bar SERIES


Disponible en acier carbone et AISI 316.  
Available: Stainless steel AISI 316.



**FEMELLE • SOCKET**

Norme Standard DIN 3852


REF. CODE	A	D (mm)	L2 (mm)	W.P. (bar)
T073TGB13	1/4" - BSP	60	28	700
T073TGB17	3/8" - BSP	70	35	700



**MÂLE • PLUG**

Norme/Standard ISO 16028

REF. CODE	A	D (mm)	L2 (mm)	W.P. (bar)
T073NUB13	1/4" - BSP	32	19	700
T073NUB17	3/8" - BSP	38	23	700



**SERIE 1000 bar**  
1000 bar SERIES


Disponible en acier carbone et AISI 316.  
Available: Stainless steel AISI 316.



**FEMELLE • SOCKET**

Norme Standard - 1000 BAR


REF. CODE	A	D (mm)	L2 (mm)	W.P. (bar)
50CJ115.1200	1/4" - BSP	61,5	28	1000
50CJ115.1404	3/8" - BSP	63,5	28	1000



**MÂLE • PLUG**

Norme Standard - 1000 BAR

REF. CODE	A	D (mm)	L2 (mm)	W.P. (bar)
50CJ115.6202	1/4" - BSP	38	22	1000
50CJ115.6402	3/8" - BSP	39,5	24	1000






**SERIE 1500 bar**  
1500 bar SERIES

Disponible en acier carbone et AISI 316.  
Available: Stainless steel AISI 316.

**FEMELLE • SOCKET**

Norme Standard DIN 3852


REF. CODE	A	D (mm)	L2 (mm)	W.P. (bar)
50CJ116.1201	1/8" - BSP	54	28	1500
50CJ116.1202	1/4" - BSP	61,5	28	1500



**MÂLE • PLUG**

Norme Standard ISO 16028


REF. CODE	A	D (mm)	L2 (mm)	W.P. (bar)
50CJ116.6201	1/8" - BSP	33,5	17	1500
50CJ116.6202	1/4" - BSP	38	22	1500



**2-VOIES HAUT PRESSION ROBINETS**  
2-WAY HIGH PRESSURE BALL VALVE




Disponible en acier carbone et AISI 316.  
Available: Stainless steel AISI 316.

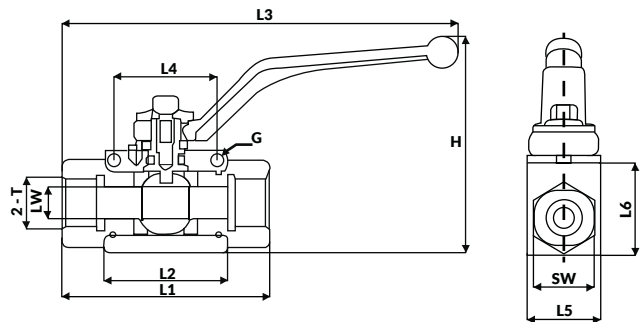

REF. CODE	Po. Inch	PRESSON MAX. SERVICE Max. Working Pressure	Ø Lw	L1	L2	L3	H	G	L4	L5	L6	T
506000.04	1/4"	500 bar	Ø6	69	40	152	78	4.5	26	26	33	1/4BSPP(NPT)
506000.06	3/8"	500 bar	Ø10	71	42	154	84	5.2	32	33	38	3/8BSPP(NPT)
506000.08	1/2"	500 bar	Ø13	82	48	159	86	6.5	37.5	36	40	1/2BSPP(NPT)
506000.12	3/4"	315 bar	Ø20	96	62	219	119	6.5	45	49	57	3/4BSPP(NPT)
506000.16	1"	315 bar	Ø25	113	66	228	128	8.5	55	58	65	1BSPP(NPT)
506000.20	1.1/4"	315 bar	Ø25	120	66	231	128	8.5	55	58	65	1-1/4BSPP(NPT)
506000.24	1.1/2"	315 bar	Ø25	130	66	236	128	8.5	55	58	65	1-1/2BSPP(NPT)

**3-VOIES HAUT PRESSION ROBINETS**  
3 - WAY HIGH PRESSURE BALL VALVE

Disponible en acier carbone et AISI 316.  
Available: Stainless steel AISI 316.

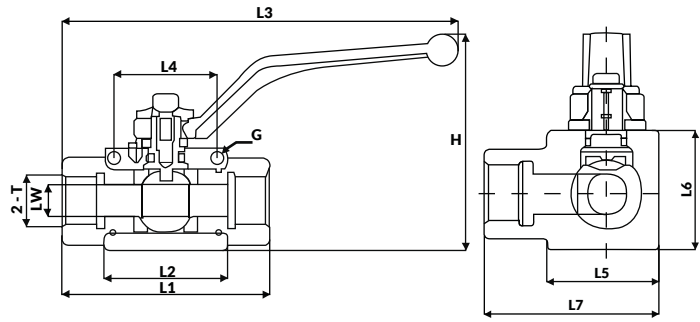

REF. CODE	Po. Inch	PRESSION MAX. SERVICE Max. Working Pressure	Ø Lw	L1	L2	L3	H	L4XG	L5	L6	L7	T
506001.04	1/4"	500 bar	Ø6	69	40	152	78	26X4.5	29	33	47.5	1/4"BSPP(NPT)
506001.06	3/8"	500 bar	Ø10	71	42	154	84	32X5.2	35	38	52	3/8"BSPP(NPT)
506001.08	1/2"	500 bar	Ø13	82	48	159	86	37.5X6.5	38	40	59	1/2"BSPP(NPT)
506001.12	3/4"	315 bar	Ø20	96	62	219	119	45X6.5	52	57	72	3/4"BSPP(NPT)
506001.16	1"	315 bar	Ø25	113	66	228	128	55X8.5	61	65	85	1"BSPP(NPT)
506001.20	1.1/4"	315 bar	Ø25	120	66	231	128	55X8.5	61	65	85	1.1/4"BSPP(NPT)
506001.24	1.1/2"	315 bar	Ø25	130	66	236	128	55X8.5	61	65	118	1.1/2"BSPP(NPT)

**NOUVELLE SÉRIES • NEW SERIES**

NOUS CONTACTER.

CONTACT US.



SERIE 35



SERIE 74



SERIE 83



SERIE 103



SERIE 93



SERIE 105



SERIE 106



SERIE 150



SERIE 152



SERIE 124



SERIE 127



SERIE 100



SERIE 165



SERIE DP



SERIE GR